


Renovating elastic floor coverings with AQUASEAL ELASTICSTAR

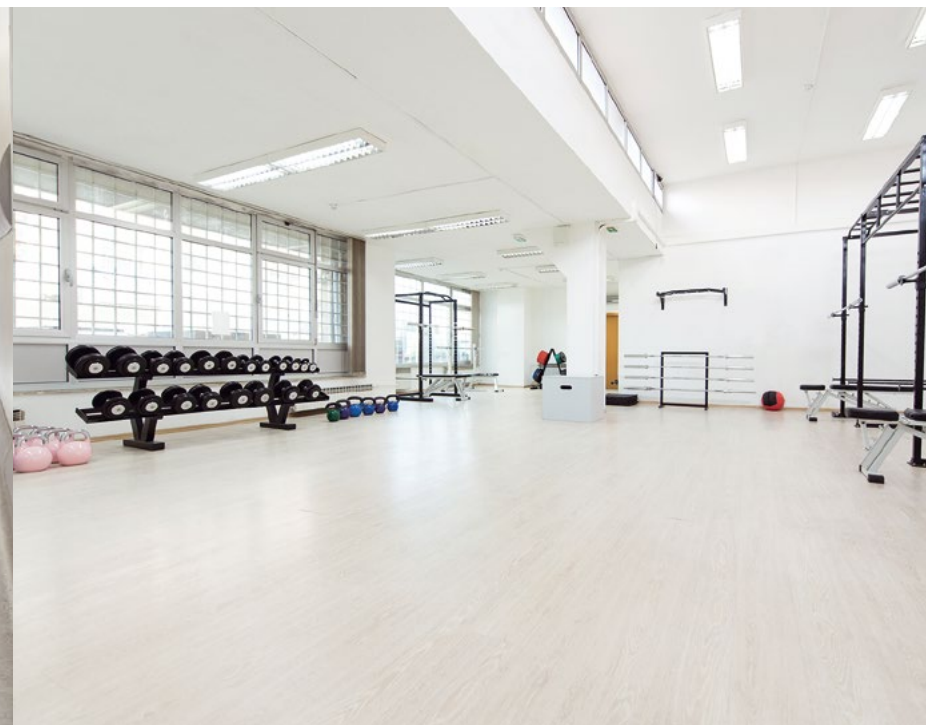

Discover the many ways of coating elastic floor coverings with ELASTICLINE!

Advantages at a glance

- + Water-based and low-emission
- + Ultra scratch-resistant
- + Superb finish possible even for older flooring
- + Very environmentally friendly, avoids plastic waste/old flooring disposal
- + Economical, less expensive than laying new flooring
- + Endless colour hue variations offer many creative options
- + Optional functional features such as R10 slip rating and sports-ready flooring
- + Versatile application for many kinds of substrates
- + High level of chemical resistance
- + Significant extension to flooring lifespan possible
- + Easier routine cleaning
- + Optional application for wet rooms
- + Certified colourfastness versus sweat/saliva (DIN 53160)



Latest Technical Data Sheets and Safety Data Sheets are part and basis of this product information and need to be observed. These are available under www.berger-seidle.de or alternatively with a sample and offer under:



Berger-Seidle
...wood floors deserve the best!

Berger-Seidle GmbH
Parkettlacke • Klebstoffe • Bauchemie
Maybachstr. 2 • 67269 Grünstadt / Weinstraße
www.berger-seidle.de • info@berger-seidle.de
Tel: +49 63 59 / 80 05-300 • Fax: +49 (0) 63 59 / 80 05-171



EN 2304-1 www.crosscreation.de

AQUASEAL

ELASTICSTAR

A world of renovations for elastic coverings



The versatile premium sealer – creative, eco-friendly and cost-effective!

Berger-Seidle
...wood floors deserve the best!



Why choose AQUASEAL ELASTICSTAR?

Does your client need help with their **PVC covering, or their designer or linoleum flooring**? ELASTICLINE is a real alternative to removing the existing, worn flooring. This **protects the environment** while saving your client money.



As the leading premium manufacturer of sealing systems for parquet flooring, Berger-Seidle is now also able to supply **bespoke solutions** for many different kinds of **elastic floor coverings**. As always, these meet the very highest quality and environmental standards – **water-based, certified low-emission and certified colourfast versus sweat/saliva**.

And without any compromises on **creativity and individuality**. If you need to retain and rejuvenate the visual appearance of the flooring, then AQUASEAL ELASTICSTAR offers the perfect clear-coat system. But if recolouring is required, then AQUASEAL ELASTICSTAR COLOR **offers you an endless variety of colour choices**, ranging from RAL colours to individual custom colours and even special colour effects.

In cases where the property must also meet **specific criteria for safety or functionality**, requirements such as **a high anti-slip rating (R10)**, sports hall flooring or **improved discolouration resistance** can all be fulfilled with the new coating system from Berger-Seidle.

As sealing specialists, parquet and flooring contractors are often **consulted for specific advice** on implementing renovation projects. The sheer variety of existing installations means that floor covering professionals handle a very **wide range of applications**. From hospitals, office complexes, high street shops and department stores to retirement homes, hotels, schools and nursery schools or sports centres: the perfect solution can always be found with ELASTICLINE from Berger-Seidle!

Renovations step by step with AQUASEAL ELASTICSTAR

- 1

Step 1: Checking the status quo
Substrate inspection, documentation, choice of approach, sign-off with customer
- 2

Step 2: Dry cleaning
Vacuuming, sweeping, wiping/mopping
- 3

Step 3: Thorough basic cleaning/post-installation cleaning
Substrate cleaning with BRILLIANCE ELASTICCLEANER and BERGERTOOL ELASTICBRUSH EXTREME (blue) – case-by-case approach.
- 4

Step 4: Take off dirt and fluids
Removal of dirt and cleaning fluids with wet vacuum cleaner or BERGERTOOL APPLICATOR and mop.
- 5

Step 5: Neutralisation finish
Uniform neutralisation of flooring surface with lukewarm water and BERGERTOOL ABRANET ACE and leave to air dry.
- 6

Step 6: Sealing
Sealing of flooring with AQUASEAL ELASTICSTAR (or variants COLOR, AQUASEAL ANTISLIP ADD, etc.) in 1-2 layers.
- 7

Step 7: Completion
The flooring is ready to take moderate loads after only 24 h (depending on interior climatic conditions).



The relevant technical data sheets, safety data sheets and special application instructions must always be followed to the letter!

ELASTICLINE products – an overview

- BRILLIANCE ELASTICCLEANER**
- For basic cleaning of elastic floor coverings
 - Mixing ratio from 1:5 to undiluted
 - Excellent solvent with non-damaging alkalinity
 - Also usable for post-installation cleaning
 - Giscode GG20



- AQUASEAL ELASTICSTAR** (incl. curing agent)
- Matt
 - Water-based 2C polyurethane-based lacquer, for coating high-traffic elastic floor coverings
 - Extremely hard-wearing with excellent chemical resistance
 - Suitable for smooth and structured surfaces
 - R9 (German DGUV codes), upgradeable to R10 with additive
 - Sports flooring approval (DIN 18032-2 and DIN EN 14904)
 - EC1
 - Giscode W3/DD+

- AQUASEAL ELASTICSTAR COLOR** (incl. curing agent)
- Matt
 - Water-based 2C polyurethane-based lacquer, for colour-coating high-traffic elastic floor coverings
 - Extremely hard-wearing with excellent chemical resistance
 - Suitable for smooth and structured surfaces
 - Colouration to RAL and NCS-S
 - Giscode W3/DD+



- AQUASEAL ANTISLIP ADD**
- Additive for producing an R10 surface
 - Tested to DIN 51130, meets German DGUV codes 108-003 and 108-004
 - Mixing ratio 1:25 with base lacquer AQUASEAL ELASTICSTAR
 - Required only in the last lacquer layer



- BRILLIANCE NEUTRALCLEANER**
- For routine cleaning and dirt removal
 - For sealed and oiled, oiled/waxed surfaces
 - Premixed and ready-to-use
 - Recommended for use with BERGERTOOL SPRAYMOP COMFORTCLEAN

- BRILLIANCE EVERCLEAR**
- Maintenance/hard sealant for elastic floor coverings
 - Anti-slip, polish-free maintenance product
 - Can be used undiluted or as mopping water additive
 - Usable on elastic floor coverings, wood and cork

Overview of tools and accessories

- BERGERTOOL MICROFASERROLLE**
- For use with all ELASTICLINE sealing products
 - Microfibre roller without roller bracket (width 25 cm)
 - Application volume 50-100ml/m² (depending on application type)
 - For producing the perfect surface

- BERGERTOOL ABRANOPP AN**
- Cleaning pad for structured surfaces
 - Ultra-coarse pad for removing even the toughest dirt deposits
 - Available diameters: 406 and 150
 - Dimensions 115 mm x 230 mm

- BERGERTOOL INTERFACEPAD**
- Damping adapter pad with good adhesive properties
 - Improves the sanding finish
 - Available diameters: 406 and 150
 - Dimensions 115 mm x 230 mm

- BERGERTOOL ABRANET ACE**
- High-performance ceramic-based sanding mesh
 - For substrate preparation of smooth, non-structured surfaces
 - Extremely long lifetime
 - For a perfect sanding finish
 - Available diameters: 406 and 150
 - Dimensions 115 mm x 230 mm
 - Available grits: 80/120/150

- BERGERTOOL APPLICATOR ELASTICPLUS**
- Width 50 cm
 - For removing excess water

- BERGERTOOL ELASTICBRUSH EXTREME**
- Cleaning tool with a very long lifetime
 - Grit brush for basic cleaning
 - Also an ideal choice for cleaning structured surfaces
 - Superior cleaning results



- BERGERTOOL PADHOLDER EASY**
- Manual scouring pad holder
 - Intended for use when working on edge areas
 - Dimensions 100 mm x 200 mm

- BERGERTOOL PADHOLDER ERGO**
- Scouring pad holder
 - Can be used while standing
 - Intended for use when working on edge areas
 - Dimensions 100 mm x 200 mm

